


**FAG 293/900-E-MB参数**

尺寸	T	250	mm	-
	A	496	mm	-
	D <sub>1</sub>	1068	mm	-
	D <sub>a max</sub>	1203	mm	-
	D <sub>b min</sub>	1343	mm	-
	d <sub>1</sub>	1235	mm	-
	d <sub>a min</sub>	1090	mm	-
	d <sub>b max</sub>	947	mm	-
	r <sub>a max</sub>	10	mm	-
	r <sub>min</sub>	12	mm	-
	T <sub>1</sub>	120	mm	-
	T <sub>2</sub>	90	mm	-
	T <sub>3</sub>	158	mm	-
	T <sub>4</sub>	180	mm	-
	重量	m	1061200	g
基本额定载荷	C <sub>a</sub>	14100000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	69000000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	385	r/min	极限转速
参考转速	n <sub>B</sub>	210	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	0	N	疲劳极限载荷, 轴向
尺寸	d	900	mm	-
	D	1320	mm	-

**FAG 293/900-E-MB图片**

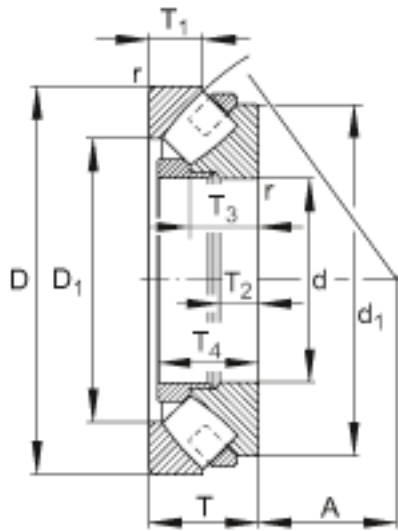

参考资料:<http://www.sozhou.com/p/168ab8c6.html>