


## SKF NRT 150 A参数

主要尺寸	d	150	mm	-
	D	240	mm	-
	H	40	mm	-
基本额定载荷	C	67100	N	动载荷
	$C_0$	160000	N	静载荷
	C	75000	N	动载荷
	$C_0$	480000	N	静载荷
极限转速	Grease lubrication	210	r/min	-
	Oil lubrication	420	r/min	-
Guideline rotary table diameter	Guideline rotary table diameter	350	mm	-
重量	重量	6200	g	-
型号	型号	NRT 150 A	-	-

## SKF NRT 150 A图片

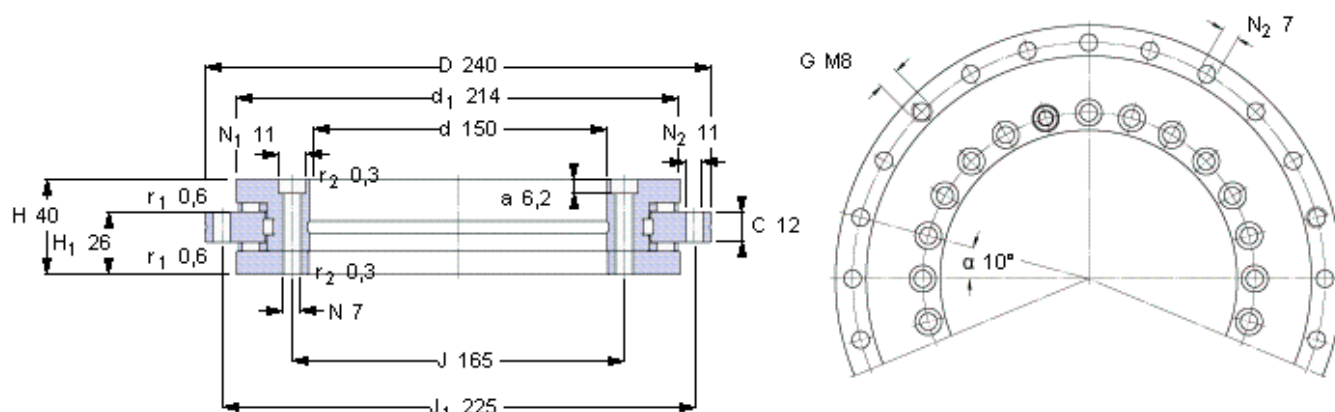

**Axial preload [kN]** 2,2  
(average value)

**Axial unloading force [kN]** 4,8  
(average value)

**Frictional moment  $C_{RL}$  [Nm]** 12  
(guideline value)

**Stiffness**  
(values refer to the roller set)

Axial [kN/ $\mu$ m] 9  
Radial [kN/ $\mu$ m] 5,5  
Movement [kNm/mrad] 35



**Retaining bolts** 2 x M6 , 180°

**Removal threads G** 3 x M8 , 120°

**Required attachment bolts**

Shaft (no. of bolts x pitch) 34 x 10°  
with 2 positions omitted at 180° apart at retaining bolt positions  
Housing (no. of bolts x pitch) 33 x 10°  
with 3 positions omitted at 120° apart at removal thread positions

**Recommended tightening torque for attachment bolts grade 10.9 [Nm]**  
14 ( M6 )

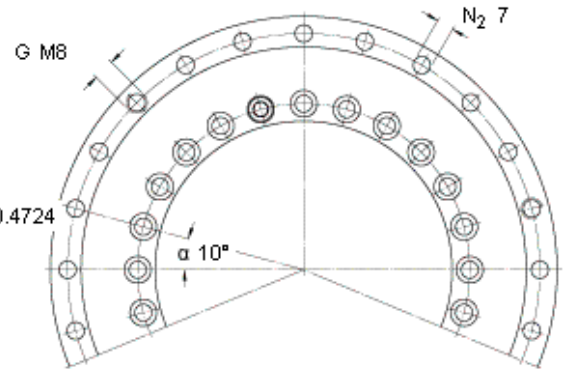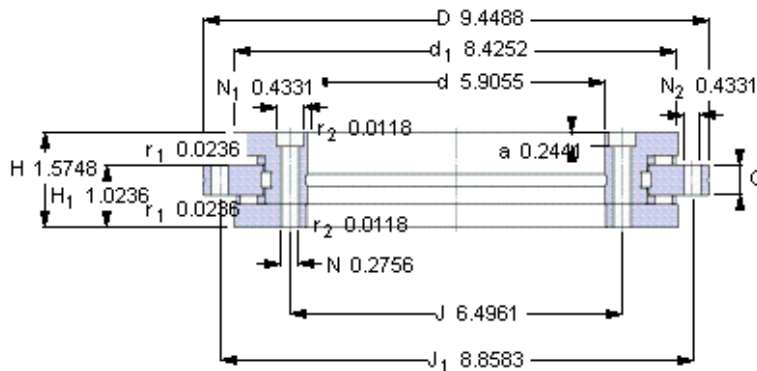

**Axial preload [kN]** 2,2  
(average value)

**Axial unloading force [kN]** 4,8  
(average value)

**Frictional moment  $C_{RL}$  [Nm]** 12  
(guideline value)

**Stiffness**

(values refer to the roller set)

Axial [kN/ $\mu$ m] 9  
Radial [kN/ $\mu$ m] 5,5  
Movement [kNm/mrad] 35

**Retaining bolts** 2 x M6 , 180°

**Removal threads G** 3 x M8 , 120°

**Required attachment bolts**

Shaft (no. of bolts x pitch) 34 x 10°  
with 2 positions omitted at 180° apart at retaining bolt positions  
Housing (no. of bolts x pitch) 33 x 10°  
with 3 positions omitted at 120° apart at removal thread positions

**Recommended tightening torque for attachment bolts grade 10.9 [Nm]**  
0.551 $\sqrt{}$  ( M6 )

参考资料: <http://www.sozhou.com/p/1c2a4aa8.html>