


### SKF BSD 60120 C参数

主要尺寸	d	60	mm	-
	D	120	mm	-
	H	20	mm	-
基本额定载荷	C	69500	N	动载荷
	$C_0$	228000	N	静载荷
疲劳载荷极限	$P_u$	8500	N	-
可达转速	Grease lubrication	5000	r/min	-
	Oil-air lubrication	6000	r/min	-
重量	重量	1050	g	-
型号	型号	BSD 60120 C	-	-

### SKF BSD 60120 C图片

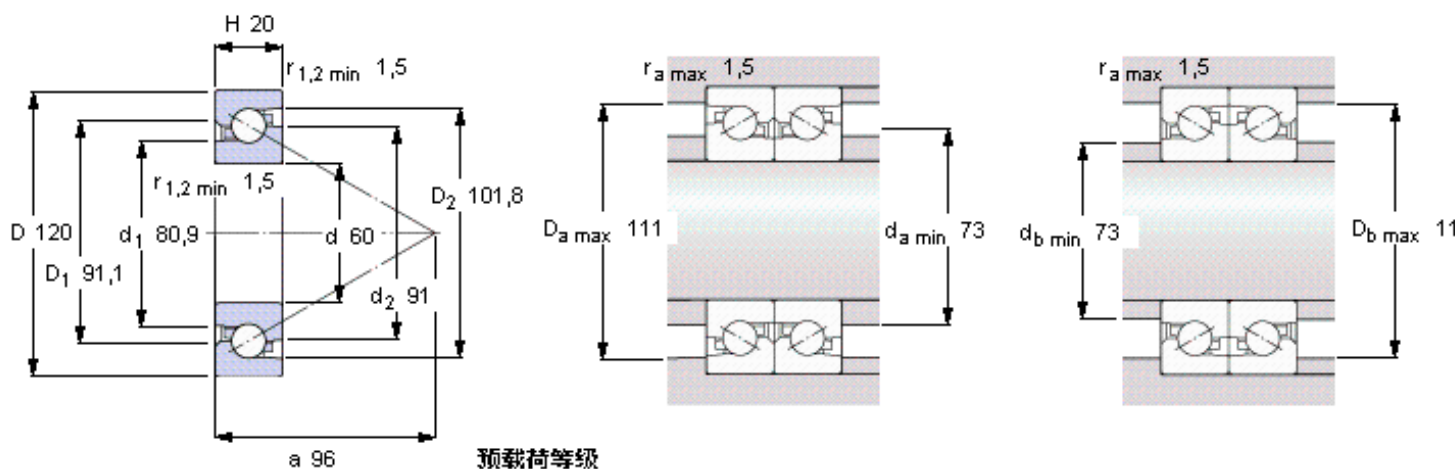

#### 预载荷等级




	A	B
Preload <sup>1)</sup> [N]	7300	14600
Frictional moment <sup>1)</sup> [Nm] (guideline value)	0,72	1,26
Static axial stiffness <sup>1)</sup> [N/μm] (guideline value)	1800	2300

**Max. axial load carrying capacity**  
(guideline value)  
130

**Reference grease quantity [cm<sup>3</sup>]**  
G<sub>ref</sub> 7,5

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/1f62da87.html>

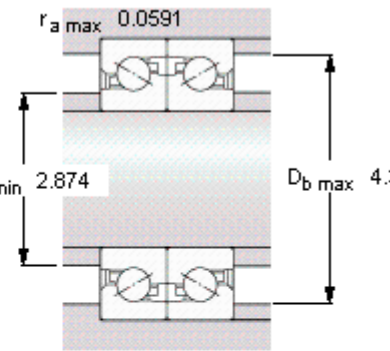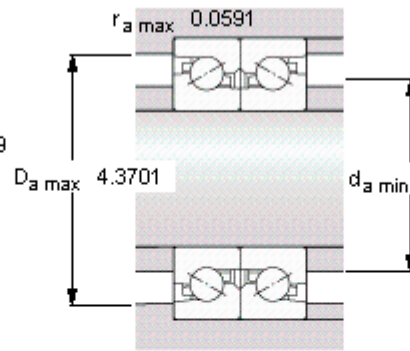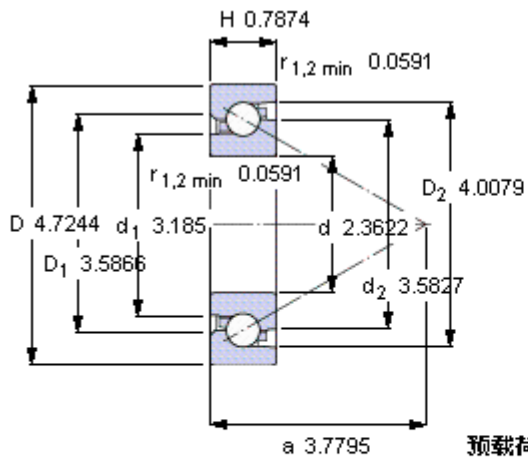

**预载荷等级**

**Preload<sup>1)</sup> [N]**

**Frictional moment<sup>1)</sup> [Nm]**

(guideline value)

**Static axial stiffness<sup>1)</sup> [N/μm]**

(guideline value)

A 7300 B 14600

0,72 1,26

1800 2300

**Max. axial load carrying capacity**

(guideline value)

130

**Reference grease quantity [cm<sup>3</sup>]**

G<sub>ref</sub> 7,5

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face