


SKF 708 CE/HCP4A参数

主要尺寸	d	8	mm	-
	D	22	mm	-
	B	7	mm	-
基本额定载荷	C	2340	N	动载荷
	C_0	800	N	静载荷
疲劳载荷极限	P_u	34	N	-
可达转速	Grease	130000	r/min	-
	Oil-air	200000	r/min	-
重量	重量	11	g	-
型号	型号	708 CE/HCP4A	-	-

SKF 708 CE/HCP4A图片

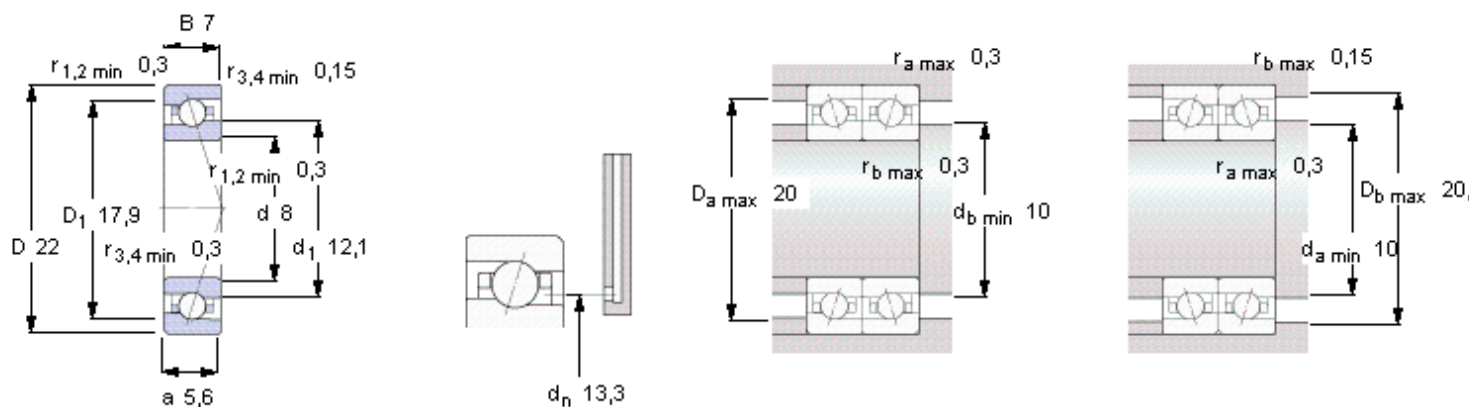

Ball diameter 3,969
Number of balls 8

未安装时的预载荷 [N]
背对背配置，面对面配置
预载荷等级

A	B	C	D
15	35	75	-

Static axial stiffness [N/ μ m]
(guideline value)

预载荷等级





A	B	C	D
11	16	22	-

Reference grease quantity [cm³]
 G_{ref} 0,17

计算系数
for equivalent bearing load
 f_0 6,6

for preload in mounted bearing sets
 f 1,02
 f_1 1
 f_{2A} 1
 f_{2B} 1,03
 f_{2C} 1,05
 f_{2D} -
 f_{HC} 1,01

参考资料: <http://www.sozhou.com/p/46e9df17.html>

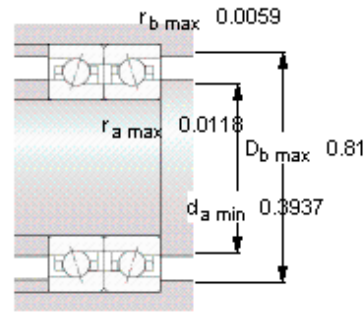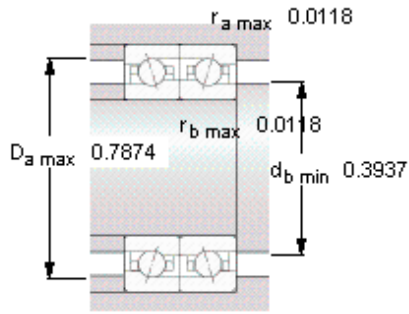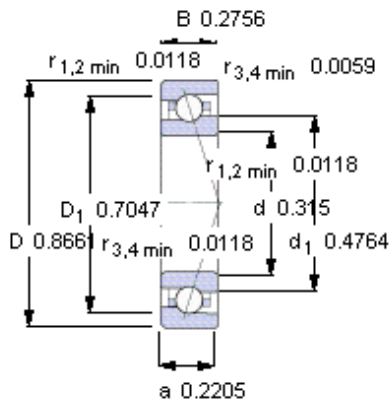

Ball diameter 3,969
Number of balls 8

未安装时的预载荷 [N]
 背对背配置，面对面配置
 预载荷等级

A	B	C	D
15	35	75	-

Static axial stiffness [N/μm]
 (guideline value)

预载荷等级

A	B	C	D
11	16	22	-

Reference grease quantity [cm³]
 G_{ref} 0,17

计算系数
for equivalent bearing load
 f₀ 6,6

for preload in mounted bearing sets
 f 1,02
 f₁ 1
 f_{2A} 1
 f_{2B} 1,03
 f_{2C} 1,05
 f_{2D} -
 f_{HC} 1,01