


FAG 29232-E1-MB参数

| | | | | |
|--------|--------------------|---------|-------|-------------|
| 尺寸 | d | 160 | mm | - |
| | D | 225 | mm | - |
| | T | 39 | mm | - |
| | A | 87 | mm | - |
| | D ₁ | 188 | mm | - |
| | D _{a max} | 204 | mm | - |
| | D _{b min} | 229 | mm | - |
| | d ₁ | 210 | mm | - |
| | d _{a min} | 195 | mm | - |
| | d _{b max} | 168 | mm | - |
| | r _{a max} | 1.5 | mm | - |
| | r _{min} | 1.5 | mm | - |
| | T ₁ | 20 | mm | - |
| | T ₂ | 14 | mm | - |
| | T ₃ | 25 | mm | - |
| | T ₄ | 37 | mm | - |
| | 重量 | m | 4700 | g |
| 基本额定载荷 | C _a | 425000 | N | 基本额定动载荷, 轴向 |
| | C _{0a} | 1760000 | N | 基本额定静载荷, 轴向 |
| 极限转速 | n _G | 2950 | r/min | 极限转速 |
| 参考转速 | n _B | 1460 | r/min | 参考速度 |
| 疲劳极限载荷 | C _{ua} | 0 | N | 疲劳极限载荷, 轴向 |

FAG 29232-E1-MB图片

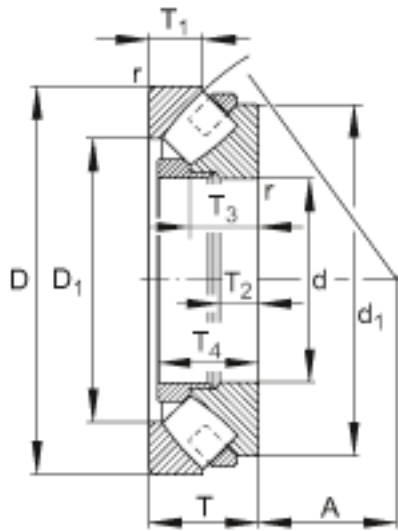

参考资料:<http://www.sozhou.com/p/518ed131.html>