


### FAG 29288-E-MB参数

尺寸	$D_{a \max}$	554	mm	-
	$D_{b \min}$	610	mm	-
	$d_1$	570	mm	-
	$d_{a \min}$	510	mm	-
	$d_{b \max}$	458	mm	-
	$r_{a \max}$	4	mm	-
	$r_{\min}$	5	mm	-
	$T_1$	49	mm	-
	$T_2$	34	mm	-
	$T_3$	61	mm	-
	$T_4$	70	mm	-
重量	m	72100	g	质量
基本额定载荷	$C_a$	2550000	N	基本额定动载荷, 轴向
	$C_{0a}$	12900000	N	基本额定静载荷, 轴向
极限转速	$n_G$	970	r/min	极限转速
参考转速	$n_B$	560	r/min	参考速度
疲劳极限载荷	$C_{ua}$	660000	N	疲劳极限载荷, 轴向
尺寸	d	440	mm	-
	D	600	mm	-
	T	95	mm	-
	A	235	mm	-
	$D_1$	506	mm	-

### FAG 29288-E-MB图片

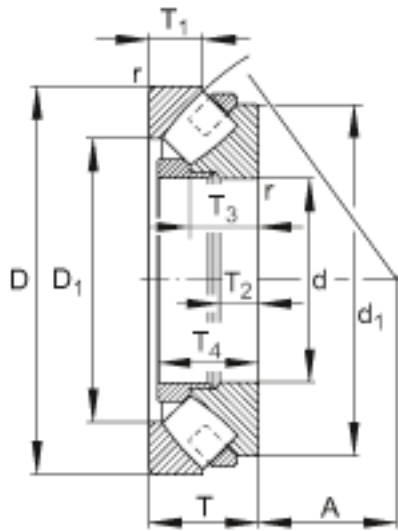

参考资料: <http://www.sozhou.com/p/6f75d0a9.html>