

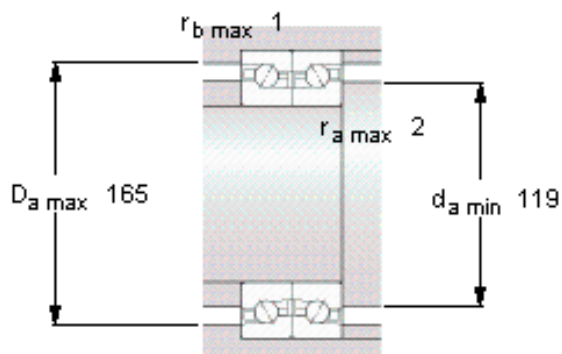


### SKF BTM 110 ATN9/P4CDBA参数

|        |         |                     |       |     |
|--------|---------|---------------------|-------|-----|
| 主要尺寸   | d       | 110                 | mm    | -   |
|        | D       | 170                 | mm    | -   |
|        | H       | 54                  | mm    | -   |
| 基本额定载荷 | C       | 57000               | N     | 动载荷 |
|        | $C_0$   | 137000              | N     | 静载荷 |
| 疲劳载荷极限 | $P_u$   | 4800                | N     | -   |
| 可达转速   | Grease  | 5600                | r/min | -   |
|        | Oil-air | 7100                | r/min | -   |
| 重量     | 重量      | 4250                | g     | -   |
| 型号     | 型号      | BTM 110 ATN9/P4CDBA | -     | -   |

### SKF BTM 110 ATN9/P4CDBA图片

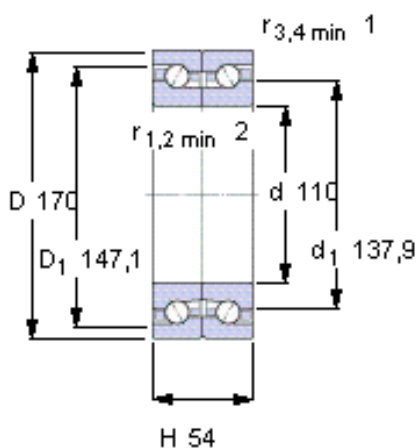

#### 未安装时的预载荷 [N]

600

#### Reference grease quantity [cm<sup>3</sup>]




$G_{\text{ref}}$  38

#### Static axial stiffness [N/ $\mu\text{m}$ ]

(guideline value)

357

参考资料:<http://www.sozhou.com/p/702bff53.html>

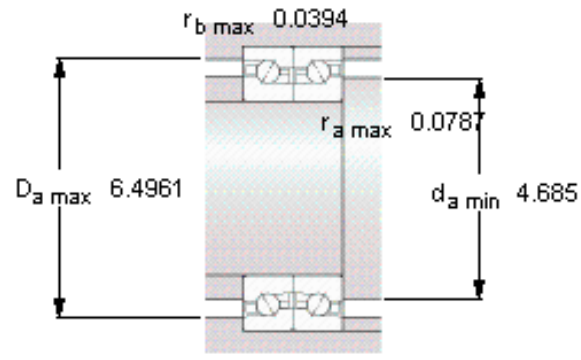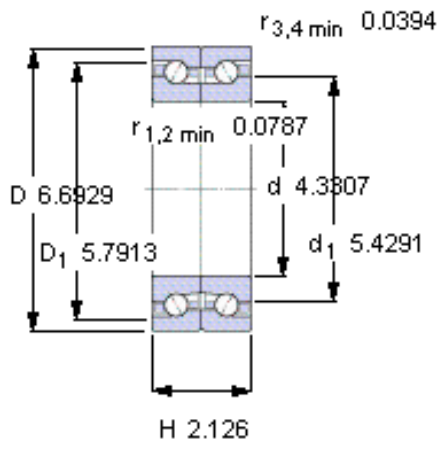

**未安装时的预载荷 [N]**

600

**Reference grease quantity [cm<sup>3</sup>]**

$G_{\text{ref}} = 38$

**Static axial stiffness [N/ $\mu\text{m}$ ]**

(guideline value)

357