


FAG NJ2216-E-TVP2 + HJ216-E参数

尺寸	B	33	mm	-
	B ₁	8	mm	-
	B ₂	12.5	mm	-
	D ₁	122.9	mm	-
	D _{a max}	129	mm	-
	d ₁	101.5	mm	-
	d _{a max}	94	mm	-
	d _{a min}	91	mm	-
	d _{c min}	104	mm	-
	E	127.3	mm	-
	F	95.3	mm	-
	r _{l min}	2	mm	-
	r _{a max}	2	mm	-
	r _{al max}	2	mm	-
	r _{min}	2	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
说明		HJ216-E		型号, L 型圈
重量	m	2040	g	质量
	m ₁	220	g	质量, L 型圈
基本额定载荷	C _r	221000	N	基本额定动载荷, 径向
	C _{0r}	244000	N	基本额定静载荷, 径向
极限转速	n _G	6100	r/min	极限转速
参考转速	n _B	3450	r/min	参考速度
疲劳极限载荷	C _{ur}	43500	N	疲劳极限载荷, 径向
尺寸	d	80	mm	-
	D	140	mm	-

FAG NJ2216-E-TVP2 + HJ216-E图片

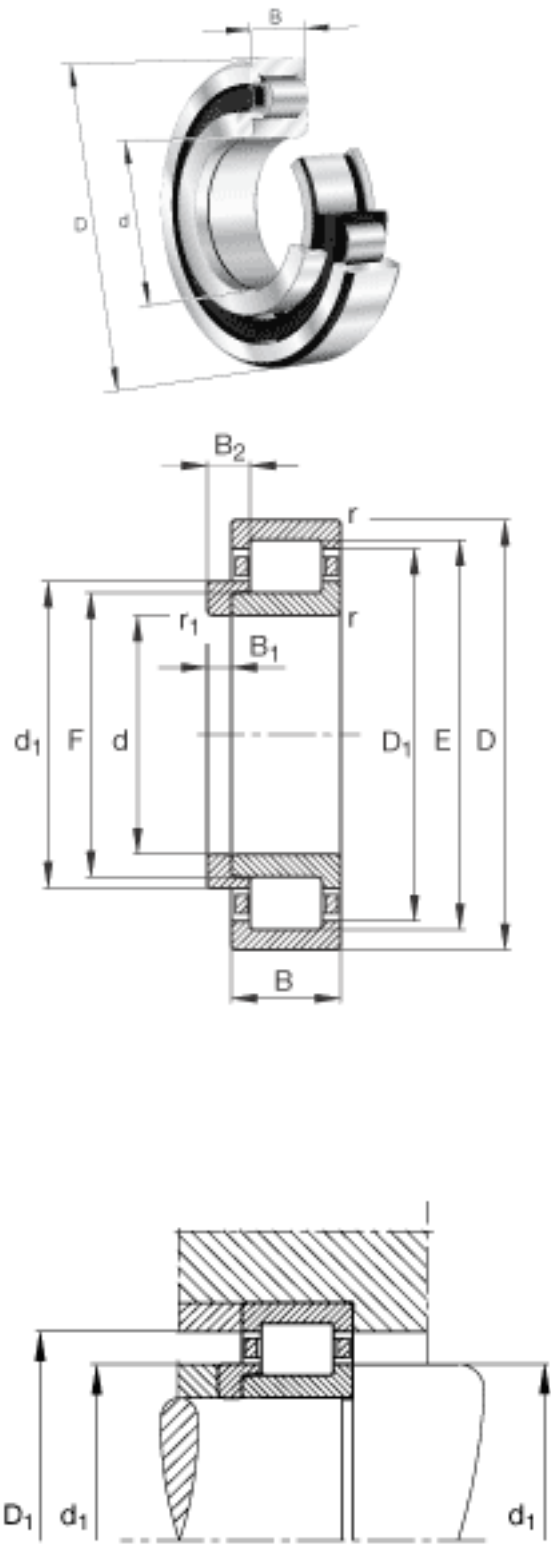

参考资料:<http://www.sozhou.com/p/70b61244.html>

