


FAG 292/1000-E-MB参数

尺寸	D_1	1139	mm	-
	$D_{a \max}$	1151	mm	-
	$D_{b \min}$	1340	mm	-
	d_1	1260	mm	-
	$d_{a \min}$	1216	mm	-
	$d_{b \max}$	1045	mm	-
	$r_{a \max}$	8	mm	-
	r_{\min}	9.5	mm	-
	T_1	98	mm	-
	T_2	68	mm	-
	T_3	117.5	mm	-
	T_4	134	mm	-
重量	m	637500	g	质量
基本额定载荷	C_a	9400000	N	基本额定动载荷, 轴向
	C_{0a}	55000000	N	基本额定静载荷, 轴向
极限转速	n_G	425	r/min	极限转速
参考转速	n_B	237	r/min	参考速度
疲劳极限载荷	C_{ua}	0	N	疲劳极限载荷, 轴向
尺寸	d	1000	mm	-
	D	1320	mm	-
	T	190	mm	-
	A	540	mm	-

FAG 292/1000-E-MB图片

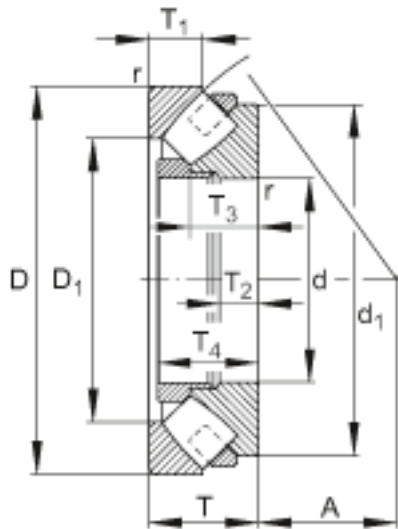

参考资料:<http://www.sozhou.com/p/95efb678.html>