


FAG NJ2209-E-TVP2 + HJ2209-E参数

尺寸	d	45	mm	-	
	D	85	mm	-	
	B	23	mm	-	
	B <sub>1</sub>	5	mm	-	
	B <sub>2</sub>	9	mm	-	
	D <sub>1</sub>	73.3	mm	-	
	D <sub>a max</sub>	78	mm	-	
	d <sub>1</sub>	59	mm	-	
	d <sub>a max</sub>	54	mm	-	
	d <sub>a min</sub>	52	mm	-	
	d <sub>c min</sub>	61	mm	-	
	E	76.5	mm	-	
	F	54.5	mm	-	
	r <sub>1 min</sub>	1.1	mm	-	
	r <sub>a max</sub>	1	mm	-	
	r <sub>al max</sub>	1	mm	-	
	r <sub>min</sub>	1.1	mm	-	
	s	1.5	mm	距离中心位置的轴向偏移	
	说明		HJ2209-E		型号, L 型圈
	重量	m	544	g	质量
m <sub>1</sub>		55	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	87000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	82000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	10200	r/min	极限转速	
参考转速	n <sub>B</sub>	5800	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	13900	N	疲劳极限载荷, 径向	

FAG NJ2209-E-TVP2 + HJ2209-E图片

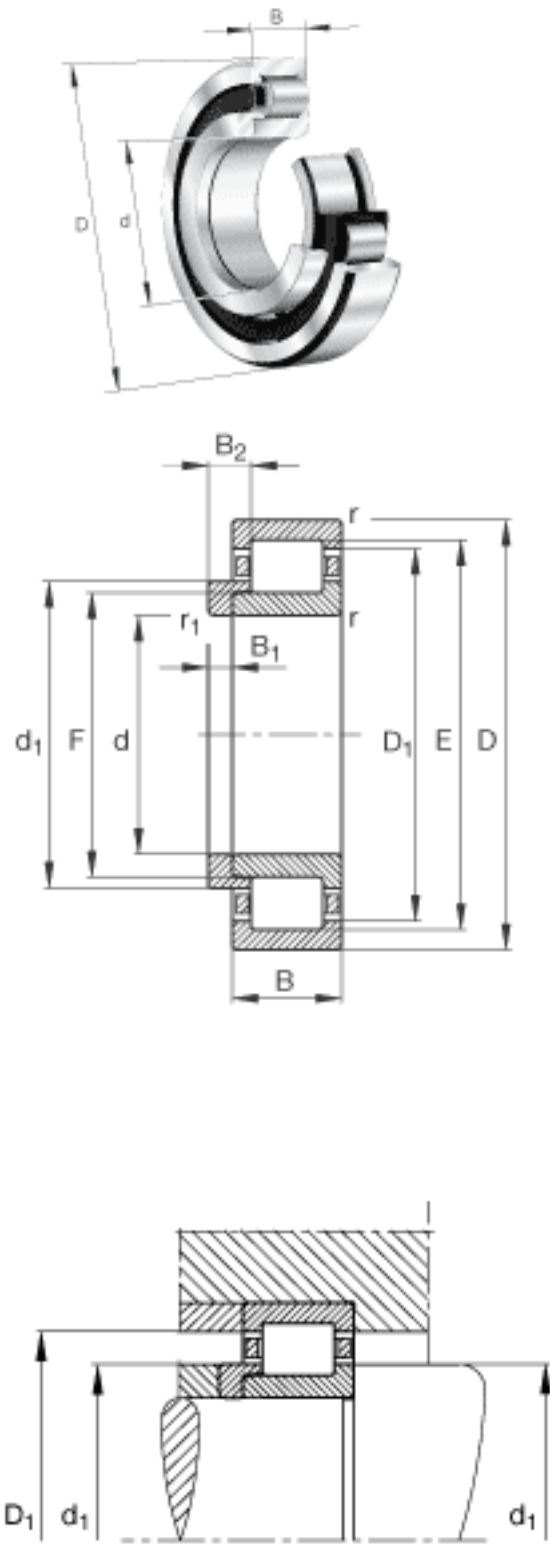

参考资料:<http://www.sozhou.com/p/ae766093.html>

