


NSK 54212U参数

安装尺寸	SRA	1.0	mm	(最大)
	SRB	0.6	mm	(最大)
重量	MASS	1660	g	重量
型号	型号	54212U		-
外形尺寸	SD2	50	mm	内径
	SD	60	mm	外径
	D	95	mm	宽度
	T1	46	mm	-
	T5	50.0	mm	-
	T7	56	mm	-
	SR	1.0	mm	(最小)
	SR1	0.6	mm	(最小)
	基本额定载荷	CAN	71500	N
COAN		169000	N	静载荷
CA		7300	kgf	动载荷
COA		17200	kgf	静载荷
极限转速	GRE	1900	1/min	脂润滑
	OIL	3000	1/min	油润滑
尺寸	SD3	95.0	mm	-
	D1	62	mm	-
	D2	78	mm	-
	D3	100	mm	-
	T2	28.0	mm	-
	T6	30.0	mm	-
	T8	33.0	mm	-
	B	10	mm	-
	SB	9.0	mm	-
	A1	30.5	mm	-
	R	72	mm	-
安装尺寸	DA	78	mm	(最大)

NSK 54212U图片

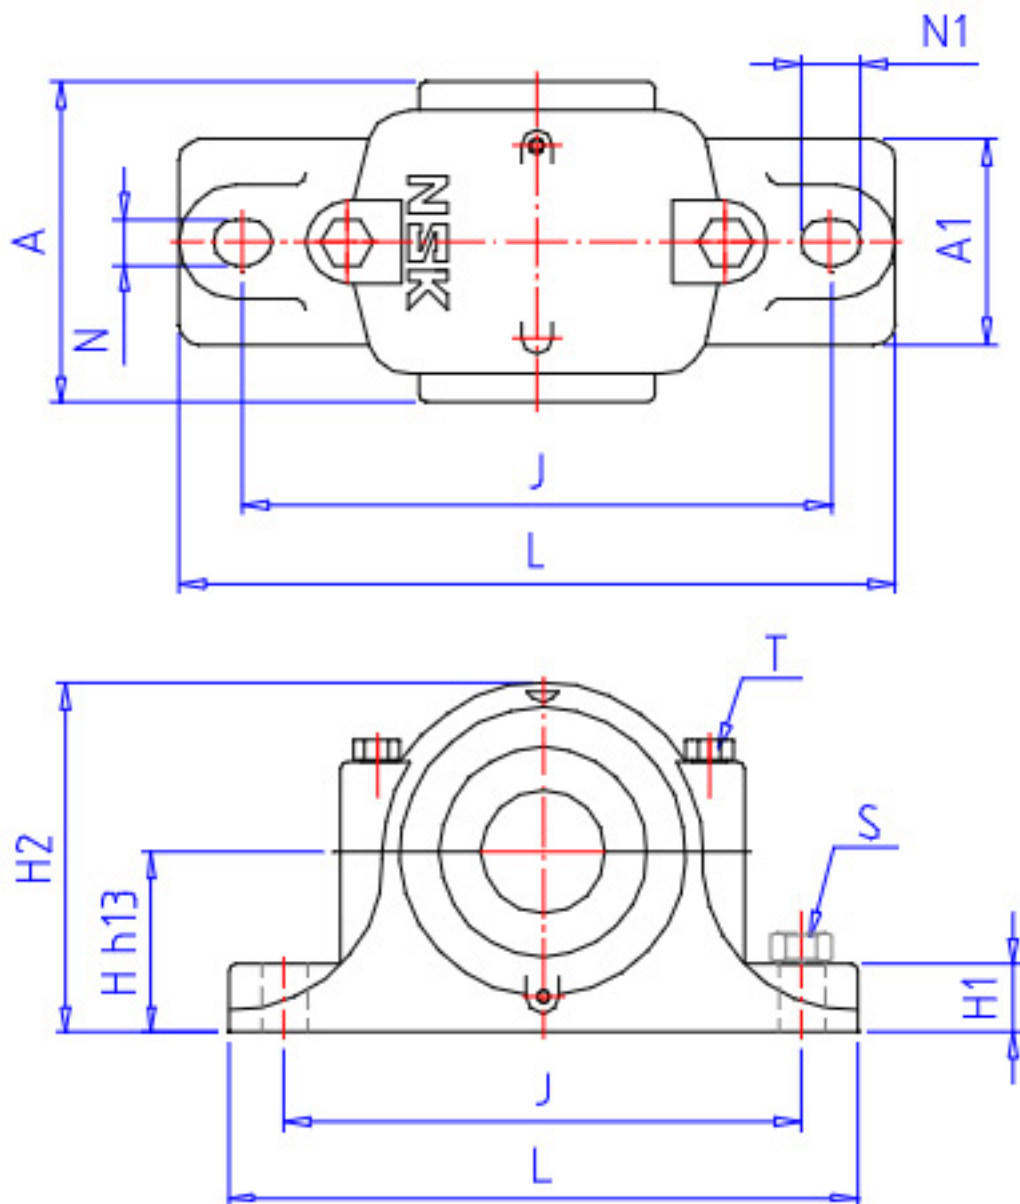

参考资料:<http://www.sozhou.com/p/bf20d0e6.html>

