


FAG NUP309-E-TVP2参数

尺寸	$r_{a \max}$	1.5	mm	-
	$r_{al \max}$	1.5	mm	-
	r_{\min}	1.5	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	937	g	质量
基本额定载荷	C_r	116000	N	基本额定动载荷, 径向
	C_{0r}	99000	N	基本额定静载荷, 径向
极限转速	n_G	8500	r/min	极限转速
参考转速	n_B	6600	r/min	参考速度
疲劳极限载荷	C_{ur}	17300	N	疲劳极限载荷, 径向
尺寸	d	45	mm	-
	D	100	mm	-
	B	25	mm	-
	B_3	4.5	mm	-
	D_1	84.1	mm	-
	$D_{a \max}$	91	mm	-
	d_1	64.4	mm	-
	$d_{a \max}$	57	mm	-
	$d_{a \min}$	54	mm	-
	$d_{c \min}$	66	mm	-
	F	58.5	mm	-
	$r_{l \min}$	1.5	mm	-

FAG NUP309-E-TVP2图片

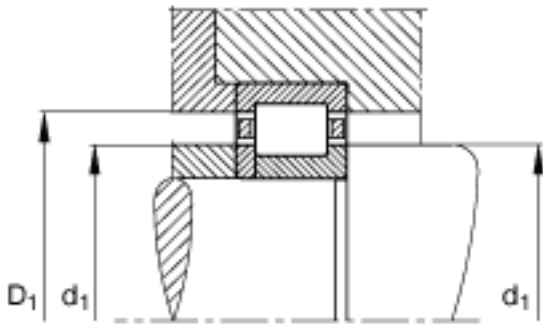

参考资料:<http://www.sozhou.com/p/c5d00a4f.html>

