


SKF BSD 2047 C参数

主要尺寸	d	20	mm	-
	D	47	mm	-
	H	15	mm	-
基本额定载荷	C	22000	N	动载荷
	C_0	49000	N	静载荷
疲劳载荷极限	P_u	1800	N	-
可达转速	Grease lubrication	9500	r/min	-
	Oil-air lubrication	12000	r/min	-
重量	重量	130	g	-
型号	型号	BSD 2047 C	-	-

SKF BSD 2047 C图片

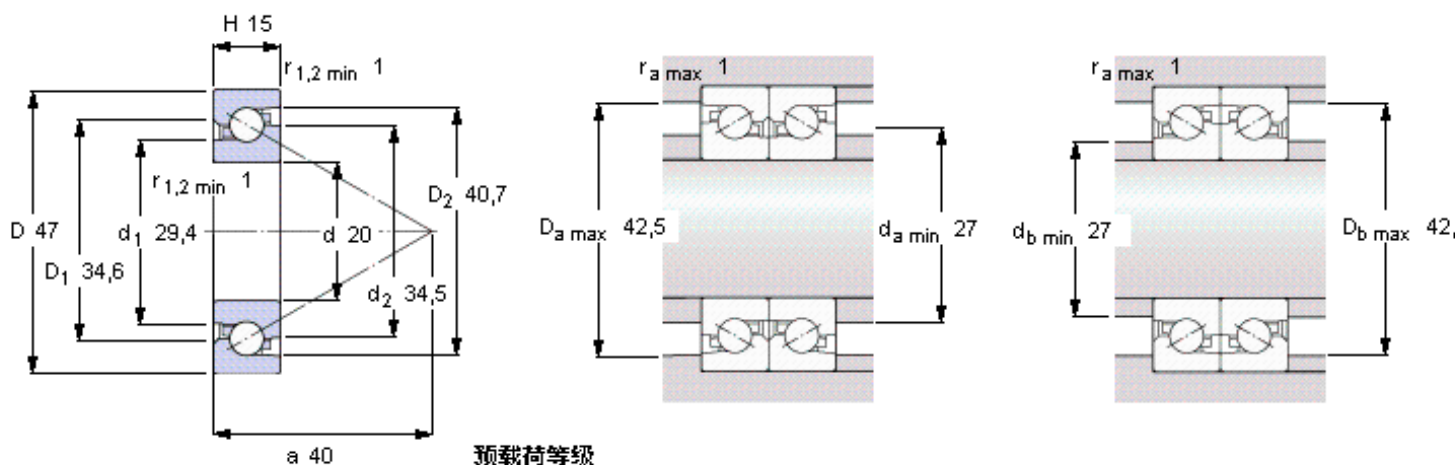

预载荷等级




	A	B
Preload ¹⁾ [N]	1480	2960
Frictional moment ¹⁾ [Nm] (guideline value)	0,05	0,091
Static axial stiffness ¹⁾ [N/μm] (guideline value)	680	860

Max. axial load carrying capacity
(guideline value)
14,5

Reference grease quantity [cm³]
 G_{ref} 1,4

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/cd31a425.html>

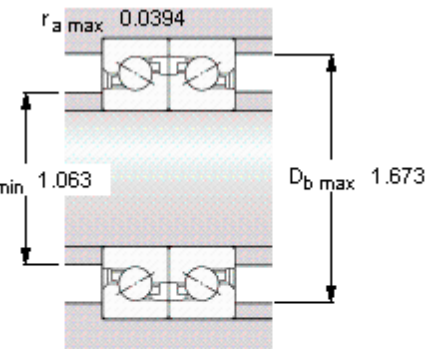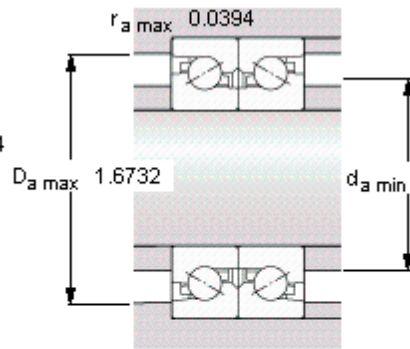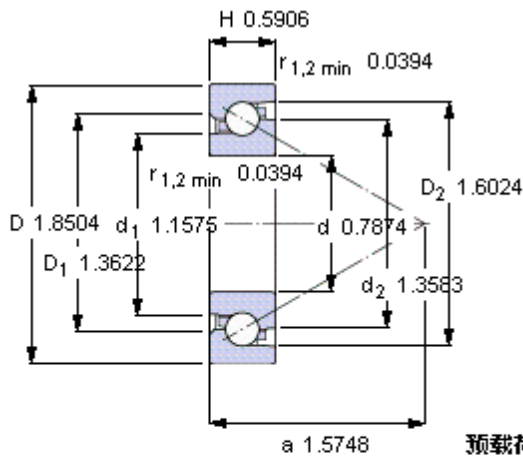

预载荷等级

	A	B
Preload ¹⁾ [N]	1480	2960
Frictional moment ¹⁾ [Nm] (guideline value)	0,05	0,091
Static axial stiffness ¹⁾ [N/μm] (guideline value)	680	860

Max. axial load carrying capacity

(guideline value)
14,5

Reference grease quantity [cm³]

G_{ref} 1,4

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face