


## NTN NUP304E参数

主要尺寸	SD	20	mm	-
	D	52	mm	外径
	B	15	mm	宽度
	R	1.1	mm	(最小)
	R1	0.6	mm	(最小)
型号	ORDER	NUP304E		型号
基本额定载荷	CR	31500	N	动载荷
	COR	26900	N	静载荷
	CRF	3 200	kgf	动载荷
	CORF	2 740	kgf	静载荷
极限转速	LSG	13 000	r/min	脂润滑
	LSO	15 000	r/min	油润滑
尺寸	FW	27.5	mm	-
	EW	0.0	mm	-
	J	31.1	mm	-
重量	MASS	180	g	重量
安装尺寸	DA1	24	mm	(最小)
	DB1	0	mm	(最小)
	DC	27	mm	(最大)
	DD	30	mm	(最小)
	DE	33	mm	(最小)
	DA	45.5	mm	(最大)
	DB2	0	mm	(最大)
	DB3	0	mm	(最小)
	RAS	1	mm	(最大)
	R1AS	0.6	mm	(最大)

## NTN NUP304E图片

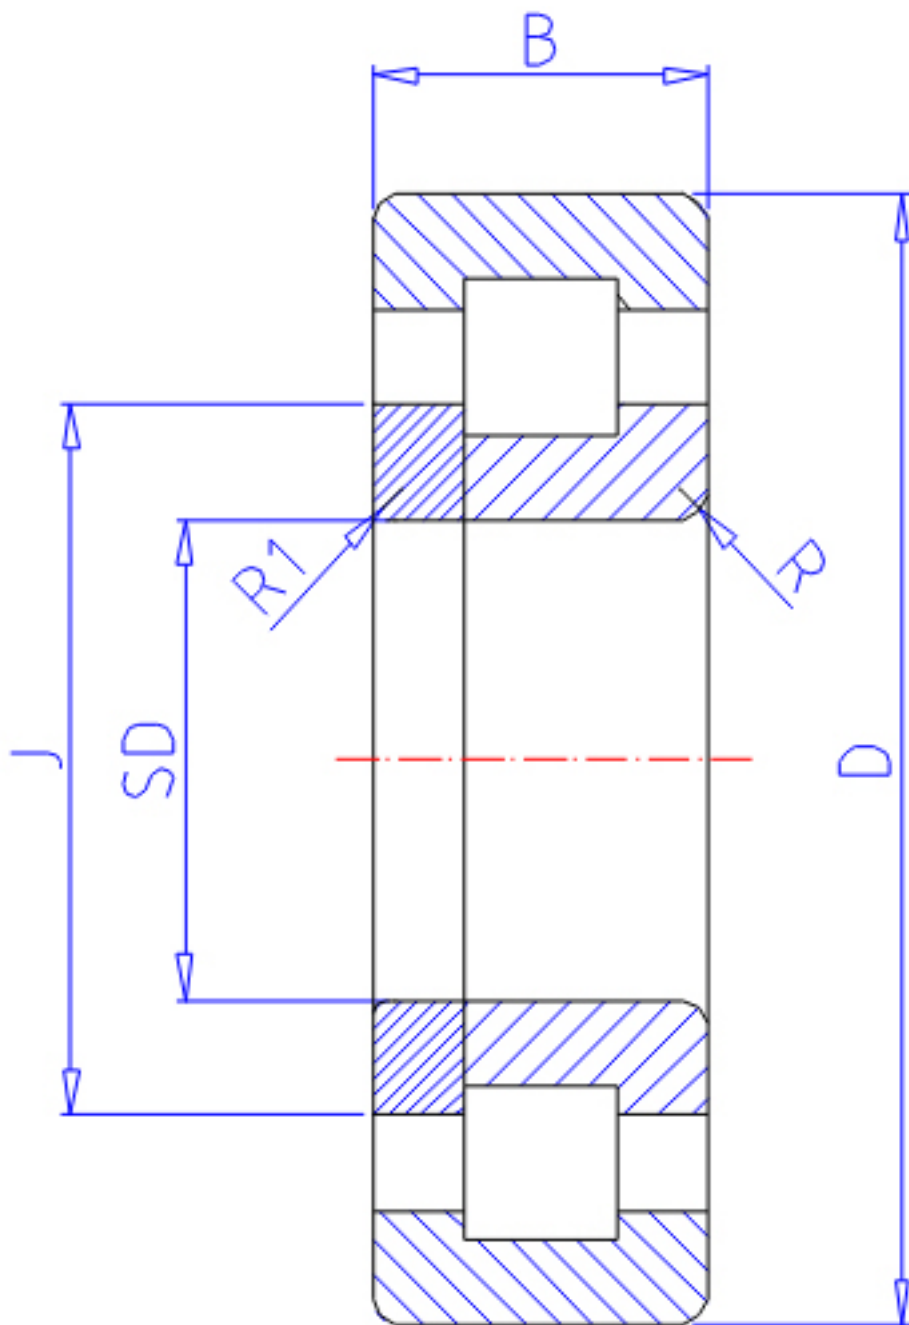

参考资料:<http://www.sozhou.com/p/dca5f4ef.html>

