


### FAG NUP2210-E-TVP2参数

尺寸	d	50	mm	-
	D	90	mm	-
	B	23	mm	-
	B <sub>3</sub>	4	mm	-
	D <sub>1</sub>	78.3	mm	-
	D <sub>a max</sub>	83	mm	-
	d <sub>1</sub>	64	mm	-
	d <sub>a max</sub>	58	mm	-
	d <sub>a min</sub>	57	mm	-
	d <sub>c min</sub>	67	mm	-
	F	59.5	mm	-
	r <sub>1 min</sub>	1.1	mm	-
	r <sub>a max</sub>	1	mm	-
	r <sub>a1 max</sub>	1	mm	-
	r <sub>min</sub>	1.1	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	597	g	质量
基本额定载荷	C <sub>r</sub>	92000	N	基本额定动载荷，径向
	C <sub>0r</sub>	88000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	9700	r/min	极限转速
参考转速	n <sub>B</sub>	5400	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	15000	N	疲劳极限载荷，径向

### FAG NUP2210-E-TVP2图片

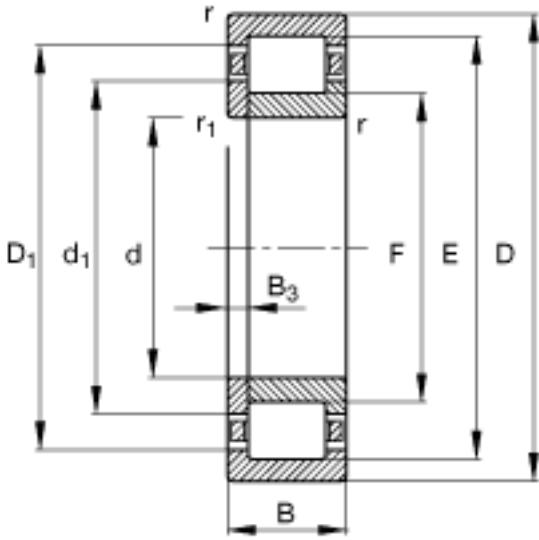

参考资料:<http://www.sozhou.com/p/e3f5b223.html>

