


NTN 4T-LM501349/LM501314参数

主要尺寸	SD	41.275	mm	-
	D	73.431	mm	外径
	T	21.430	mm	宽度
	B	19.812	mm	宽度
	C	16.604	mm	宽度
安装尺寸	R	3.5	mm	(最大)
	R1	0.8	mm	(最小)
型号	ORDER	4T-LM501349/LM501314		型号
基本额定载荷	CR	56000	N	动载荷
	COR	69500	N	静载荷
	CRF	5 700	kgf	动载荷
	CORF	7 100	kgf	静载荷
极限转速	LSG	5 000	r/min	脂润滑
	LSO	6 600	r/min	油润滑
作用点	A	3.3	mm	-
重量	MASS	360	g	重量
安装尺寸	DA1	53	mm	(最小)
	DB1	46.5	mm	(最大)
	DA	66	mm	(最大)
	DB	70	mm	(最小)
常数	E	0.4		-
轴向载荷系数	Y2	1.5		-
	Y0	0.83		-

NTN 4T-LM501349/LM501314图片

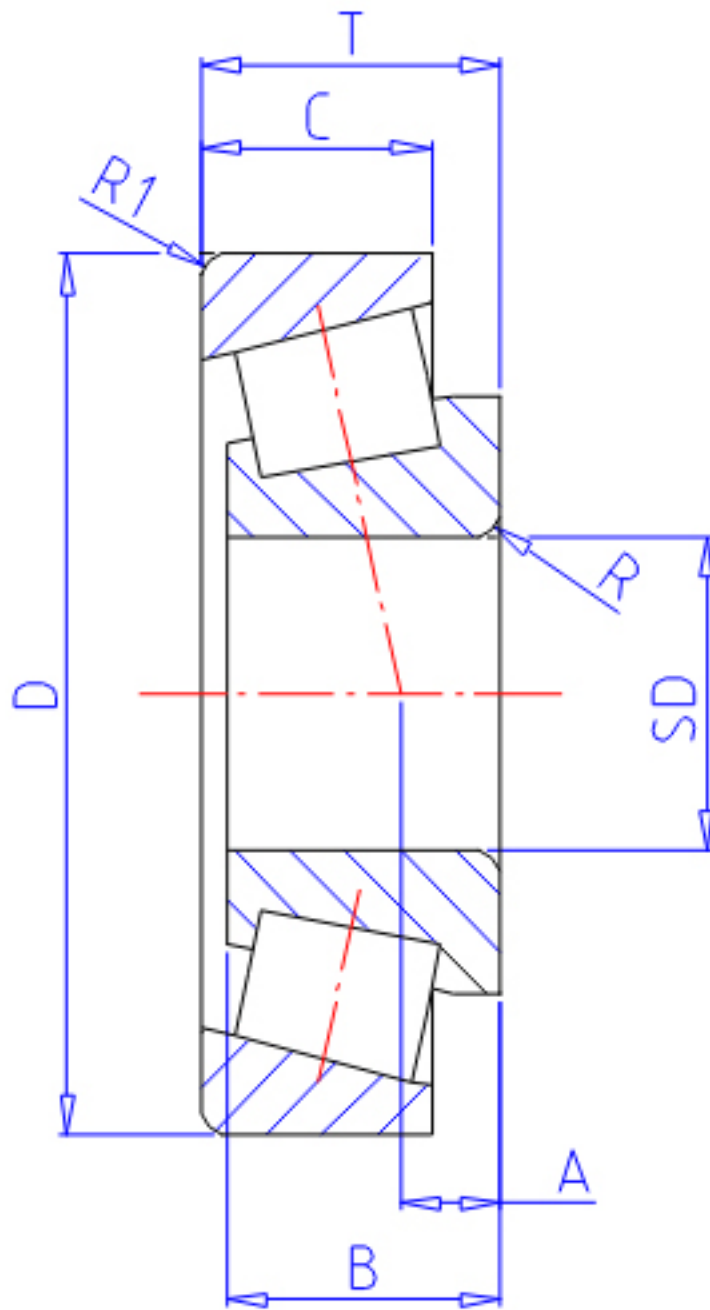

参考资料:<http://www.sozhou.com/p/e85d5602.html>

