


FAG NJ2220-E-TVP2 + HJ2220-E参数

|        |                      |          |       |             |
|--------|----------------------|----------|-------|-------------|
| 尺寸     | $r_{l \text{ min}}$  | 2.1      | mm    | -           |
|        | $r_{a \text{ max}}$  | 2.1      | mm    | -           |
|        | $r_{al \text{ max}}$ | 2.1      | mm    | -           |
|        | $r_{\text{min}}$     | 2.1      | mm    | -           |
|        | s                    | 3        | mm    | 距离中心位置的轴向偏移 |
| 说明     |                      | HJ2220-E |       | 型号, L 型圈    |
| 重量     | m                    | 4850     | g     | 质量          |
|        | $m_1$                | 446      | g     | 质量, L 型圈    |
| 基本额定载荷 | $C_r$                | 395000   | N     | 基本额定动载荷, 径向 |
|        | $C_{0r}$             | 445000   | N     | 基本额定静载荷, 径向 |
| 极限转速   | $n_G$                | 4550     | r/min | 极限转速        |
| 参考转速   | $n_B$                | 2900     | r/min | 参考速度        |
| 疲劳极限载荷 | $C_{ur}$             | 76000    | N     | 疲劳极限载荷, 径向  |
| 尺寸     | d                    | 100      | mm    | -           |
|        | D                    | 180      | mm    | -           |
|        | B                    | 46       | mm    | -           |
|        | $B_1$                | 10       | mm    | -           |
|        | $B_2$                | 16       | mm    | -           |
|        | $D_1$                | 156.9    | mm    | -           |
|        | $D_{a \text{ max}}$  | 168      | mm    | -           |
|        | $d_1$                | 127.3    | mm    | -           |
|        | $d_{a \text{ max}}$  | 117      | mm    | -           |
|        | $d_{a \text{ min}}$  | 112      | mm    | -           |
|        | $d_{c \text{ min}}$  | 130      | mm    | -           |
|        | E                    | 163      | mm    | -           |
|        | F                    | 119      | mm    | -           |

FAG NJ2220-E-TVP2 + HJ2220-E图片

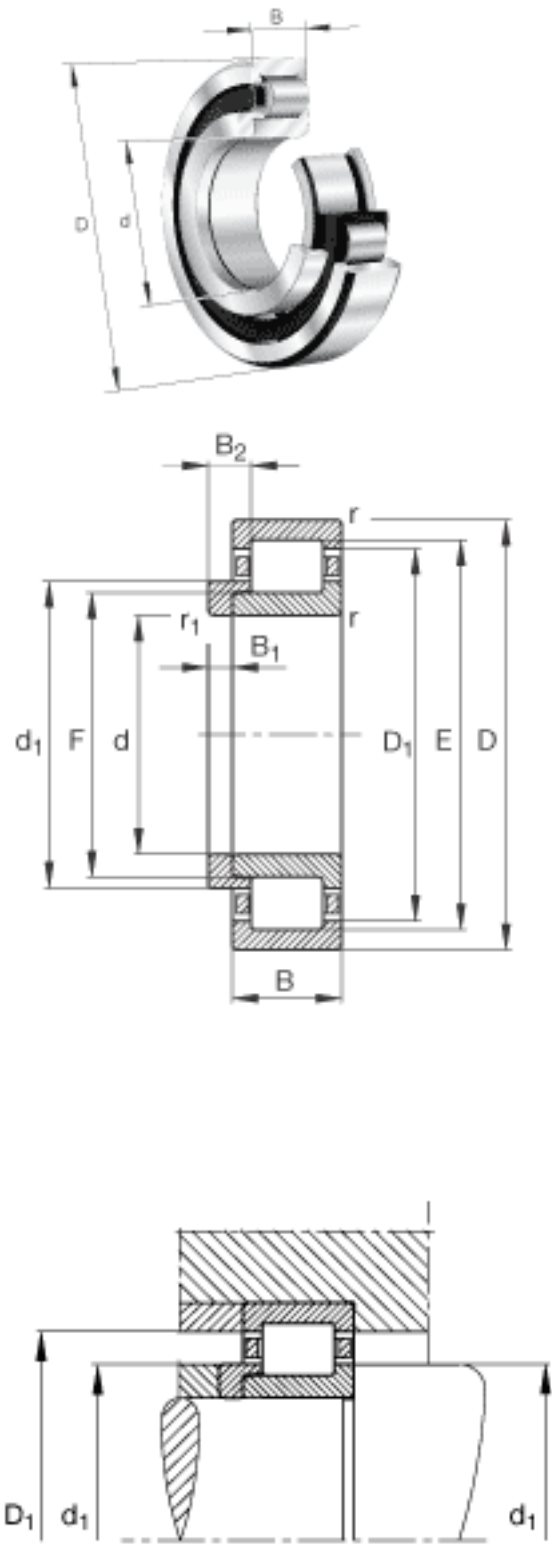

参考资料:<http://www.sozhou.com/p/e940f7ba.html>

