


FAG 239/600-B-K-MB + H39/600参数

尺寸	$d_{1H}$	560	mm	-	
	D	800	mm	-	
	B	150	mm	-	
	$B_{a \min}$	20	mm	-	
	c	75	mm	-	
	$c_1$	96	mm	-	
	$D_1$	740.5	mm	-	
	$D_{a \max}$	782	mm	-	
	$D_m$	700	mm	-	
	d	600	mm	-	
	$d_{a \max}$	653	mm	-	
	$d_{b \min}$	618	mm	-	
	$d_s$	12.5	mm	-	
	l	239	mm	-	
	$n_s$	23.5	mm	-	
	$r_{a \max}$	4	mm	-	
	$r_{\min}$	5	mm	-	
	说明		H39/600		质量, 紧定套
	重量	m	210000	g	质量
$m_1$		129000	g	质量, 紧定套	
基本额定载荷	$C_r$	3450000	N	基本额定动载荷, 径向	
计算系数	e	0.17		-	
	$Y_1$	3.95		-	
	$Y_2$	5.88		-	
基本额定载荷	$C_{0r}$	8650000	N	基本额定静载荷, 径向	
计算系数	$Y_0$	3.86		-	
极限转速	$n_G$	810	r/min	极限转速	

参考转速	$n_B$	435	r/min	参考速度
疲劳极限载荷	$C_{ur}$	630000	N	疲劳极限载荷，径向

FAG 239/600-B-K-MB + H39/600图片

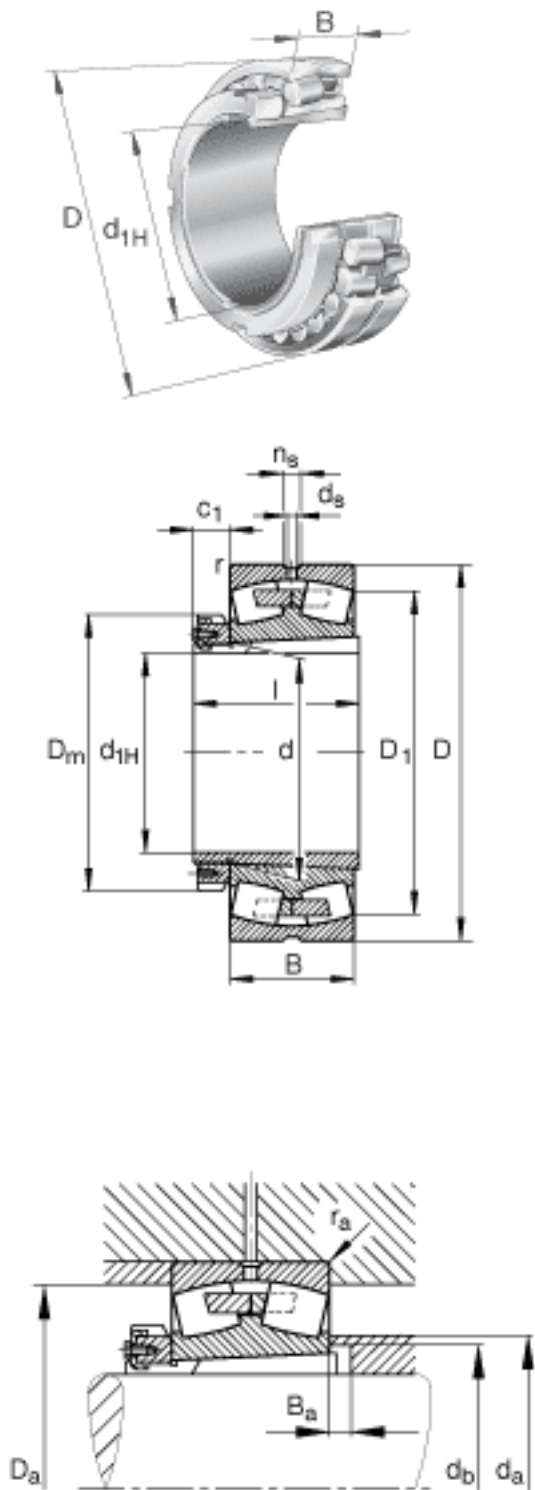

参考资料:<http://www.sozhou.com/p/ea2f369f.html>