


### NTN NK68/35R+IR60x68x35参数

型号	ORDER	NK68/35R+IR60x68x35		型号
尺寸	SD	60	mm	-
	D	82	mm	外径
	C	35	mm	宽度
	R	0.60	mm	-
	F	68	mm	-
基本额定载荷	CR	63000	N	动载荷
	COR	139000	N	静载荷
	CRF	6400	kgf	动载荷
	CORF	14200	kgf	静载荷
极限转速	LSG	4000	r/min	脂润滑
	LSO	6000	r/min	油润滑
重量	MASS	551	g	重量

### NTN NK68/35R+IR60x68x35图片

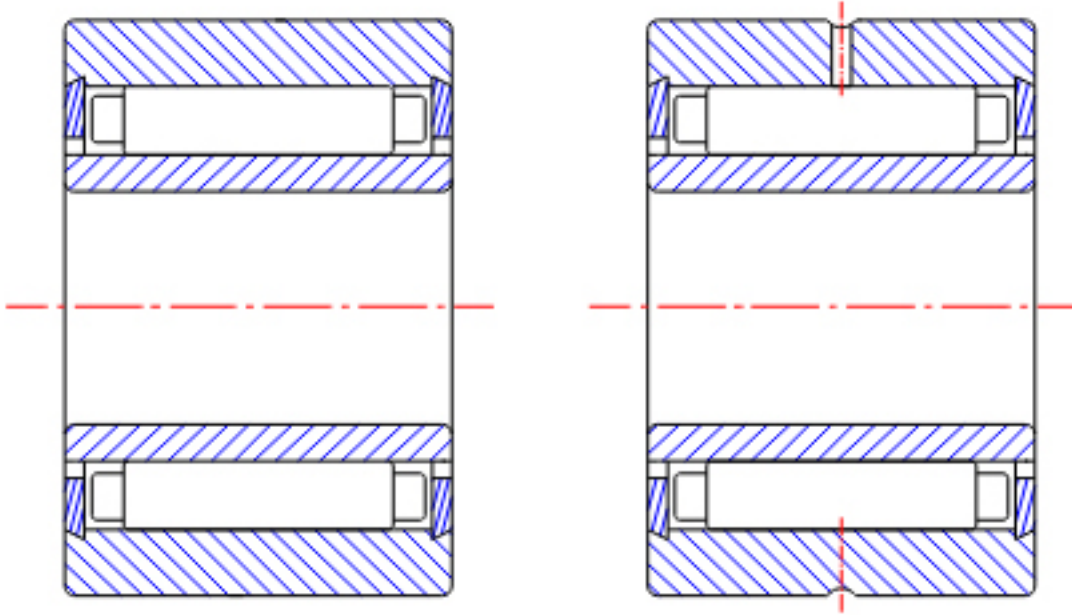

NK+IR  
(SD ≤ 9)

NA49  
(SD ≤ 9)

参考资料:<http://www.sozhou.com/p/ec01bbc3.html>



NA49...R ( $SD \geq 10$ )  
 NA49  
 NA48, NA59  
 NA69...R ( $SD \leq 30$ )  
 NK+IR ( $SD \geq 10$ )  
 NK, NK...R+IR

NA69...R  
 ( $SD \geq 32$ )