


### FAG NJ305-E-TVP2 + HJ305-E参数

尺寸	$d_{c \min}$	40	mm	-
	E	54	mm	-
	F	34	mm	-
	$r_{l \min}$	1.1	mm	-
	$r_{a \max}$	1	mm	-
	d	25	mm	-
	D	62	mm	-
	B	17	mm	-
	$B_1$	4	mm	-
	$r_{a1 \max}$	1	mm	-
	$r_{\min}$	1.1	mm	-
		s	1.5	mm
说明		HJ305-E		型号, L 型圈
重量	m	250	g	质量
	$m_1$	25	g	质量, L 型圈
基本额定载荷	$C_r$	49000	N	基本额定动载荷, 径向
	$C_{0r}$	37500	N	基本额定静载荷, 径向
极限转速	$n_G$	14400	r/min	极限转速
参考转速	$n_B$	10200	r/min	参考速度
尺寸	$B_2$	7	mm	-
	$D_1$	50.7	mm	-
	$D_{a \max}$	55	mm	-
	$d_1$	38.1	mm	-
	$d_{a \max}$	33	mm	-
	$d_{a \min}$	32	mm	-
疲劳极限载荷	$C_{ur}$	5600	N	疲劳极限载荷, 径向

FAG NJ305-E-TVP2 + HJ305-E图片

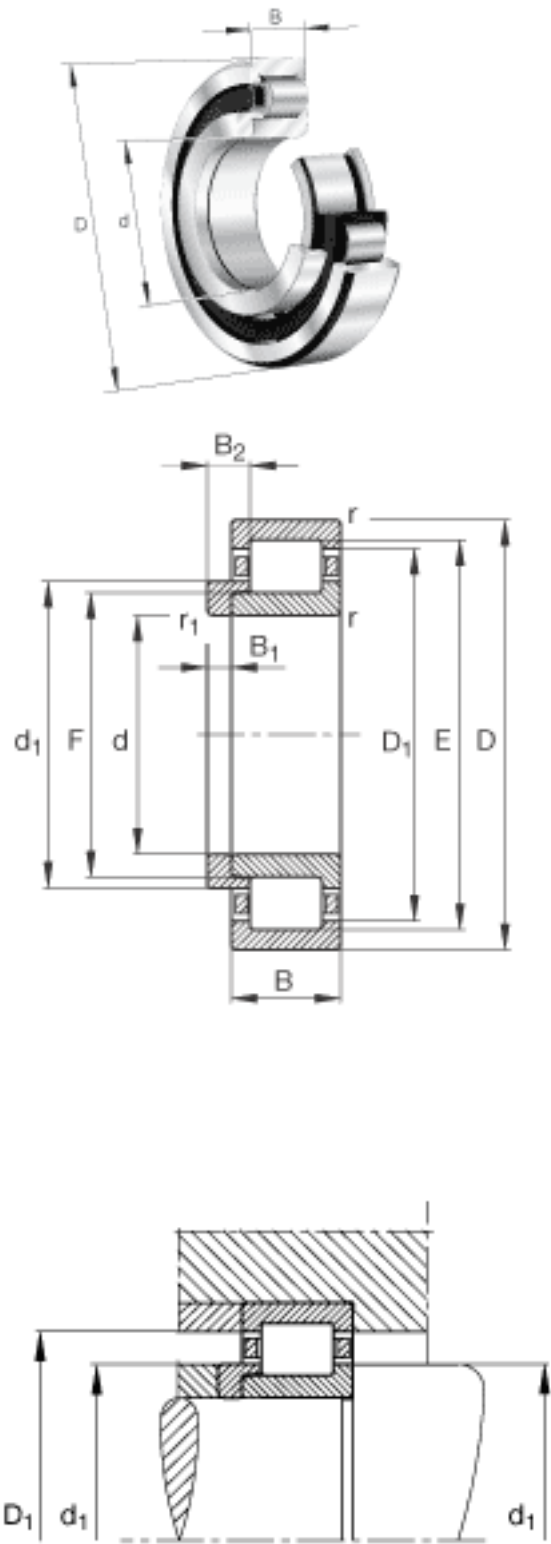

参考资料:<http://www.sozhou.com/p/ecc36242.html>

