


FAG NJ318-E-TVP2 + HJ318-E参数

尺寸	d	90	mm	-	
	D	190	mm	-	
	B	43	mm	-	
	B ₁	12	mm	-	
	B ₂	18.5	mm	-	
	D ₁	161.6	mm	-	
	D _{a max}	176	mm	-	
	d ₁	124	mm	-	
	d _{a max}	111	mm	-	
	d _{a min}	104	mm	-	
	d _{c min}	127	mm	-	
	E	169.5	mm	-	
	F	113.5	mm	-	
	r _{1 min}	3	mm	-	
	r _{a max}	2.5	mm	-	
	r _{al max}	2.5	mm	-	
	r _{min}	3	mm	-	
	s	1.5	mm	距离中心位置的轴向偏移	
	说明		HJ318-E		型号, L 型圈
	重量	m	5490	g	质量
m ₁		623	g	质量, L 型圈	
基本额定载荷	C _r	370000	N	基本额定动载荷, 径向	
	C _{0r}	350000	N	基本额定静载荷, 径向	
极限转速	n _G	4250	r/min	极限转速	
参考转速	n _B	3750	r/min	参考速度	
疲劳极限载荷	C _{ur}	59000	N	疲劳极限载荷, 径向	

FAG NJ318-E-TVP2 + HJ318-E图片

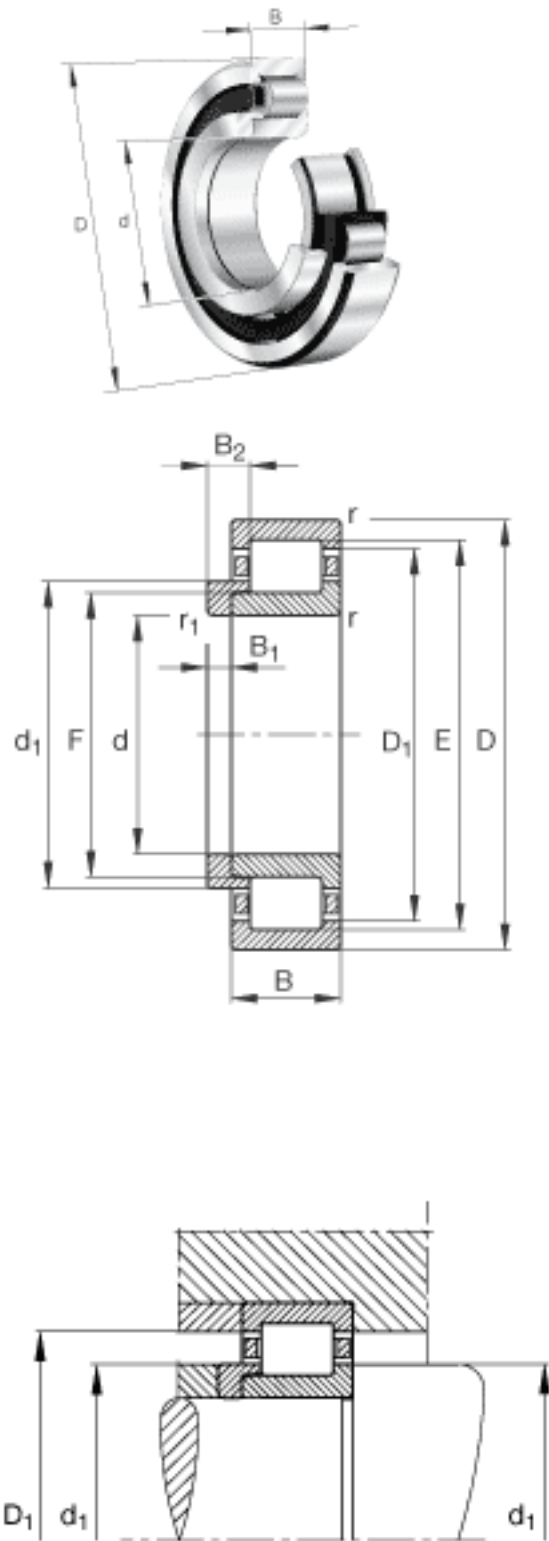

参考资料:<http://www.sozhou.com/p/725e848a.html>

