
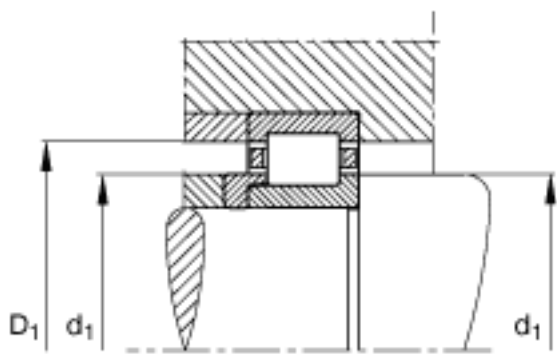


FAG NJ330-E-M1 + HJ330-E参数

尺寸	$B_1$	15	mm	-
	$B_2$	25	mm	-
	$D_1$	269.8	mm	-
	$D_{a \max}$	303	mm	-
	$d_1$	209.5	mm	-
	$d_{a \max}$	190	mm	-
	$d_{a \min}$	167	mm	-
	$d_{c \min}$	213	mm	-
	E	283	mm	-
	F	193	mm	-
	$r_{1 \min}$	4	mm	-
	$r_{a \max}$	3	mm	-
	$r_{al \max}$	3	mm	-
	$r_{\min}$	4	mm	-
	s	5.5	mm	距离中心位置的轴向偏移
说明		HJ330-E		型号, L 型圈
重量	m	27400	g	质量
	$m_1$	2330	g	质量, L 型圈
基本额定载荷	$C_r$	900000	N	基本额定动载荷, 径向
	$C_{0r}$	930000	N	基本额定静载荷, 径向
极限转速	$n_G$	3200	r/min	极限转速
参考转速	$n_B$	1970	r/min	参考速度
疲劳极限载荷	$C_{ur}$	139000	N	疲劳极限载荷, 径向
尺寸	d	150	mm	-
	D	320	mm	-
	B	65	mm	-

FAG NJ330-E-M1 + HJ330-E图片

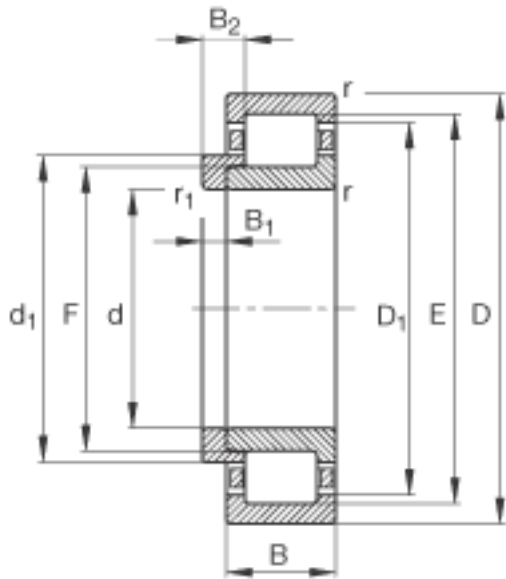

参考资料:<http://www.sozhou.com/p/d49bd174.html>

